



MOUNTING KIOSKS ACCESS CONTROL



1200-160

1200-170

1200-175



lockable
electrical compartment



easy access
for repair and maintenance



built in
ultra-bright LED lighting



baked on
enamel finish for
weather resistance

- Telephone entry system mounting kiosks are ideal for walk-up pedestrian applications and are designed for DKS Flush Mount systems
- Baked on crinkle coat enamel finish is durable and weather resistant
- Lockable ELECTRICAL panel includes 4 convenience outlets for accessory transformers, and mounting space for surge suppressors and an access control radio receiver
- Kiosks feature ultra-bright energy saving LEDs to provide illumination to the entry system


FEATURES

ACCESS CONTROL SOLUTIONS






Kiosk style mounting posts are pad mounted and are designed to accommodate flush style telephone entry systems only. These kiosks are designed for walk up pedestrian applications. An electrical compartment can hold up to four (4) accessory transformers, three (3) surge suppressors and an RF radio receiver. Additionally, these kiosks include ultra bright LED illumination that provides exceptional illumination on the entry system.

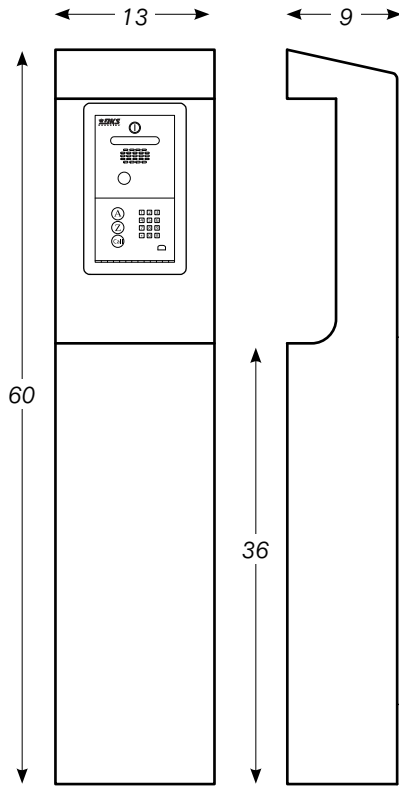

1200-160

(1802-EPD shown for illustration only)

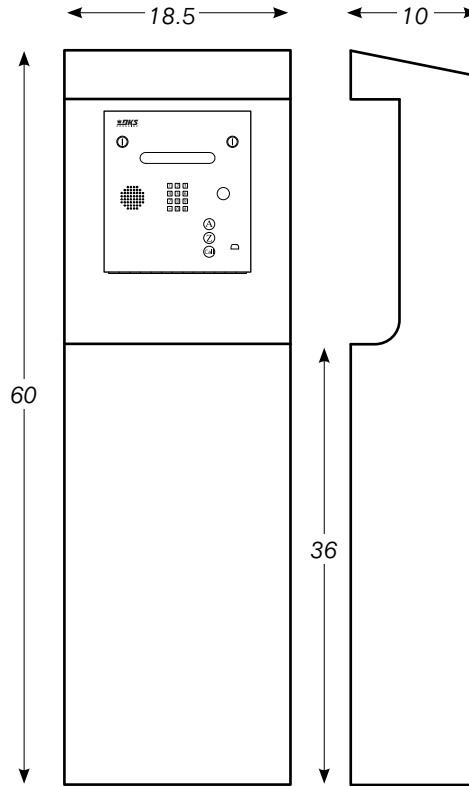

1200-170 / 1200-175

(1835 shown for illustration only)

Mounting Kiosks

1200-160

60" high x 13" wide x 9" deep

Use with DKS 1802 and 1802-EPD Flush Mount units only.

1200-170

60" high x 18.5" wide x 10" deep

Use with DKS 1803, 1810, 1833, 1834, 1835, 1837 Flush Mount units only.

1200-175

60" high x 18.5" wide x 10" deep

Use with DKS 1812 Classic, 1812 Plus and 1812 Access Plus Flush Mount units only.

All Kiosks

Designed for use with Flush Mount systems only.

Kiosks are pad mounted.

Locked accessory compartment holds four (4) transformers, three (3) surge suppressors, and a radio receiver.

All models include ultra-bright LED lighting to illuminate entry system.

Distributed by:

DOOR KING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2011 All Rights Reserved. Product specifications may change without notice. Rev. 2/11

MEMBER:

